

Docket AUS920000310US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000**IN THE CLAIMS**

Please amend the claims as follows:


1. (currently amended) A method for crawling a web site, the method comprising the steps of:

a) querying a web site server by a crawler program, wherein at least one page of the web site has a reference, wherein the reference is specified by a script for executing by a browser to produce an address for a next page;

b) parsing such a reference from one of the web pages by the crawler program and sending the reference to an applet running in a the browser; and

c) determining the address for the next page by the browser executing responsive to the reference and sending the address to the crawler.

2. (currently amended) The method of claim 12, the browser being configured to use a certain proxy, and refer to a resolver file for hostname-to-IP-address-resolution, ~~and wherein the web site server has an IP address and~~ the proxy for the browser has a certain IP address, the certain IP address of the proxy being different than the IP address of the web site server, and

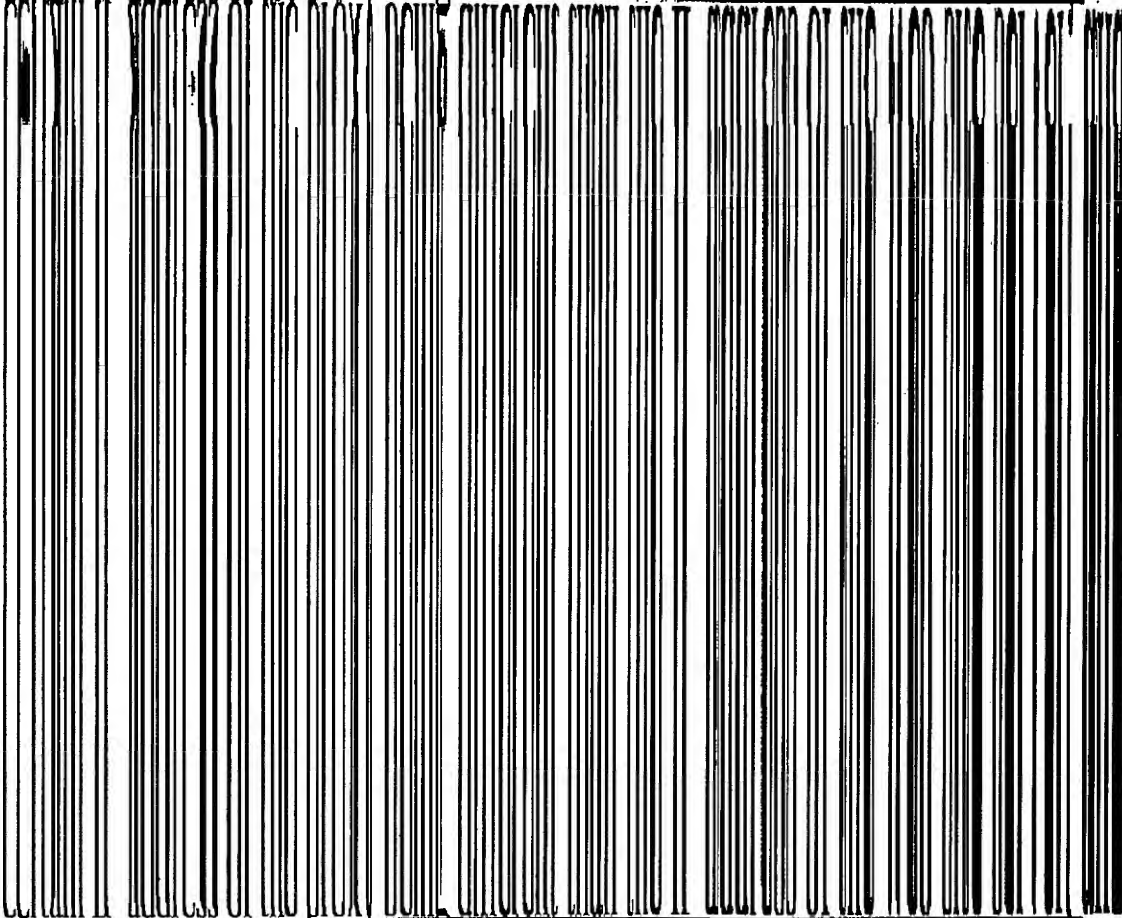

wherein the resolver file indicates the certain IP address of the proxy and the IP address for the web site server.

Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000**IN THE CLAIMS**

Please amend the claims as follows:

1. (currently amended) A method for crawling a web site, the method comprising the steps of:

a) querying a web site server by a crawler program, wherein at least one page of the web site has a reference, wherein the reference is specified by a script for executing by a browser to produce an address for a next page;

b) parsing such a reference from one of the web pages by the crawler program and sending the reference to an applet running in a the-browser; and

c) determining the address for the next page by the browser executing responsive to the reference and sending the address to the crawler.

2. (currently amended) The method of claim 12, the browser being configured to use a certain proxy; and refer to a resolver file for hostname-to-IP-address-resolution, and wherein the web site server has an IP address and, the proxy for the browser has a certain IP address, the certain IP address of the proxy being different than the IP address of the web site server, and wherein the resolver file indicates the certain IP address of the proxy as the IP address for the web site server.

3. (original) The method of claim 2, comprising the steps of:  
adding an onload attribute to one of the web pages by the proxy;  
defining an event handler for the onload attribute by the proxy, wherein the event handler sets a certain variable; and  
polling the certain variable by the applet to determine when the page is loaded.

Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

4. (currently amended) The method of claim 1, wherein the crawler is programmable to perform particular action sequences for selecting non-hypertext-link parameters from the at least one web page in a particular sequence, so that generating the queries to the web server include the selected parameters and a context arising from the particular sequence.

5. (currently amended) The method of claim 1, at least ~~one~~ some of the web pages being dynamically generated by the server responsive to corresponding ones of the queries, comprising the step of:

processing the server generated web pages to generate corresponding processed versions of the web pages, so that the processed versions can be served in response to future queries, reducing dynamic generation of web pages by the server.

6. (original) The method of claim 5, wherein at least a first such server generated web page has included in it an operation that would cause the server to dynamically generate a second web page if the first page were used to generate further requests to the server, and wherein the step of processing the server generated web pages comprises the step of:

removing the operation from the first server generated web page and replacing the operation with a reference to a version of another of the server generated web pages.

Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

7. (currently amended) A method for reducing dynamic data generation on a web site server, the method comprising the steps of:

a) querying a web site server by a crawler program responsive to references from one web page to another in the web site, wherein the queries are for causing the server to generate web pages, at least some-one of the web pages being dynamically generated; and

b) processing the server generated web pages to generate corresponding processed versions of the web pages, so that the processed versions can be served in response to future queries, reducing dynamic generation of web pages by the server, wherein at least a first such server generated web page has included in it an operation that would cause the server to dynamically generate a second web page if the first page were used to generate further requests to the server, the operation including a number of non-hypertext-link elements on the first page selected in a particular sequence, and wherein the step of processing the server generated web pages comprises the step of:

removing the operation from the first server generated web page and replacing the operation with a reference to a version of another of the server generated web pages.

8. (canceled)

9. (currently amended) A computer program product for crawling a web site, wherein the computer program product resides on a computer usable medium having computer readable program code, the computer-program code product-comprising:

a) first instructions for querying a web site server by a crawler program, wherein at least one page of the web site has a reference, wherein the reference is specified by a script for executing by a browser to producing an address for a next page;

b) second instructions for parsing such a reference from one of the web pages by the crawler program and sending the reference to an applet running in a the-browser; and

c) third instructions for determining the address for the next page by the browser executing responsive to the reference and sending the address to the crawler.

Docket AUS920000510US1.

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

10. (currently amended) The computer program product of claim 9, the browser being configured to use a certain proxy, and refer to a resolver file for hostname-to-IP-address-resolution, ~~and wherein the web site server has an IP address and~~, the proxy for the browser has a certain IP address, the certain IP address of the proxy being different than the IP address of the web site server, and wherein the resolver file indicates the certain IP address of the proxy as the IP address for the web site server.

11. (original) The computer program product of claim 10, comprising:  
fourth instructions for adding an onload attribute to one of the web pages by the proxy;  
fifth instructions for defining an event handler for the onload attribute by the proxy,  
wherein the event handler sets a certain variable; and  
sixth instructions for polling the certain variable by the applet to determine when the page is loaded.

12. (currently amended) The computer program product of claim 9, wherein the first instructions comprise instructions for causing the crawler to perform particular action sequences for selecting non-hypertext-link parameters from the at least one web page in a particular sequence, so that generating the queries to the web server include the selected parameters and a context arising from the particular sequence.

13. (currently amended) The computer program product of claim 21, at least ~~some one~~ of the web pages being dynamically generated by the server responsive to corresponding ones of the queries, the computer program product comprising:

instructions for processing the server generated web pages to generate corresponding processed versions of the web pages, so that the processed versions can be served in response to future queries, reducing dynamic generation of web pages by the server.

Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

14. (original) The computer program product of claim 13, wherein at least a first such server generated web page has included in it an operation that would cause the server to dynamically generate a second web page if the first page were used to generate further requests to the server, and wherein the instructions for processing the server generated web pages to generate corresponding processed versions of the web pages comprise:

instructions for removing the operation from the first server generated web page and replacing the operation with a reference to a version of another of the server generated web pages.

15. (currently amended) A computer program product for reducing dynamic data generation on a web site server, wherein the computer program product resides on a computer usable medium having computer readable program code, the computer program product program code comprising:

first instructions for querying a web site server by a crawler program responsive to references from one web page to another in the web site, wherein the queries are for causing the server to generate web pages, at least some one of the web pages being dynamically generated; and

second instructions for processing the server generated web pages to generate corresponding processed versions of the web pages, so that the processed versions can be served in response to future queries, reducing dynamic generation of web pages by the server, wherein at least a first such server generated web page has included in it an operation that would cause the server to dynamically generate a second web page if the first page were used to generate further requests to the server, the operation including a number of non-hypertext-link elements on the first page selected in a particular sequence, and wherein the second instructions comprise:

instructions for removing the operation from the first server generated web page and replacing the operation with a reference to a version of another of the server generated web pages.

16. (canceled)

Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

17. (currently amended) An apparatus for ~~for crawling a web site~~, the apparatus comprising:

a processor connected a network,

a storage device connected to the processor and the network, wherein the storage device is for storing a program for controlling the processor, and wherein the processor is operative with the program to execute a crawler program and a browser program for performing the steps of:

a) querying a web site server by the crawler, wherein at least one page of the web site has a reference, wherein the reference is specified by a script for executing by the browser to producing an address for a next page;

b) parsing such a reference from one of the web pages and sending the reference to an applet running in a the browser; and

c) determining the address for the next page by the browser executing responsive to the reference and sending the address to the crawler.

18. (currently amended) The apparatus of claim 17, the browser being configured to use a certain proxy; and refer to a resolver file for hostname-to-IP-address-resolution, and wherein the web site server has an IP address and the proxy for the browser has a certain IP address, the certain IP address of the proxy being different than the IP address of the web site server, and wherein the resolver file indicates the certain IP address of the proxy as the IP address for the web site server.

19. (original) The apparatus of claim 18, wherein an onload attribute is added to one of the web pages by the proxy, and an event handler is defined for the onload attribute to set a certain variable, and wherein the processor is operative with the program for performing the step of:

polling the certain variable by the applet to determine when the page is loaded.

Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

20. (currently amended) The apparatus of claim 17, wherein the processor is operative with the program for causing the crawler to perform particular action sequences for selecting non-hypertext-link parameters from the at least one web page in a particular sequence, so that generating the queries to the web server include the selected parameters and a context arising from the particular sequence.

21. (currently amended) The apparatus of claim 17, at least ~~some one~~ of the web pages being dynamically generated by the server responsive to corresponding ones of the queries, wherein the processor is operative with the program for performing the step of:

processing the server generated web pages to generate corresponding processed versions of the web pages, so that the processed versions can be served in response to future queries, reducing dynamic generation of web pages by the server.

22. (original) The apparatus of claim 21, wherein at least a first such server generated web page has included in it an operation that would cause the server to dynamically generate a second web page if the first page were used to generate further requests to the server, and wherein the step of processing the server generated web pages comprises the step of:

removing the operation from the first server generated web page and replacing the operation with a reference to a version of another of the server generated web pages.



Docket AUS920000510US1

Appl. No.: 09/736,349  
Filing Date: December 14, 2000

23. (currently amended) An apparatus for reducing dynamic data generation on a web site server, the apparatus comprising:

a processor connected to a network,

a storage device connected to the processor and the network, wherein the storage device is for storing a program for controlling the processor, and wherein the processor is operative with the program to execute a crawler program and a browser program for performing the steps of:

a) querying a web site server by the crawler responsive to references from one web page to another in the web site, wherein the queries are for causing the server to generate web pages, at least some one of the web pages being dynamically generated; and

b) processing the server generated web pages to generate corresponding processed versions of the web pages, so that the processed versions can be served in response to future queries, reducing dynamic generation of web pages by the server, wherein at least a first such server generated web page has included in it an operation that would cause the server to dynamically generate a second web page if the first page were used to generate further requests to the server, the operation including a number of non-hypertext-link elements on the first page selected in a particular sequence, and wherein the step of processing the server generated web pages comprises the step of:

removing the operation from the first server generated web page and replacing the operation with a reference to a version of another of the server generated web pages.

24. (canceled)